



MER-DBEL:

Decorative Emergency Unit

Project:	
Type:	
Catalog #:	

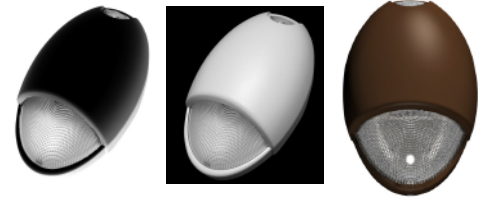

Dimensions

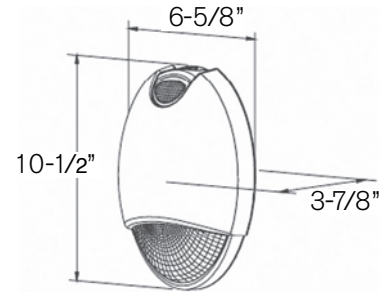

Illumination

- Long lasting, efficient ultra-bright white LED.
- Mirror-bright reflector and prismatic polycarbonate refractor.

Electrical

- Dual 120V/277V.
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.
- Long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- Surface mount via easy connect back plate that fits most standard size junction boxes
- Conduit mount via rigid conduit entry provision on top of the unit.

Construction

- Decorative, low-profile, architectural design.
- Die-cast aluminum housing.
- Durable powder coat finishes in white, black and dark bronze.
- Sealed and gasketed.

Electrical information

	Supply Voltage	Max. Watts	Max. Amps
DBEL-SDT	120V	2.7 W	0.026A
	277V	2.8 W	0.012A
DBEL-SDT-CW	120V	2.9 W	0.031A
	277V	3.0 W	0.014A

Warranty and Listing

- Five year warranty on all electronics and housing. Batteries pro-rated for five years.
- UL listed standard for wet locations (0°- 50°C/32°F-122°F). CW option UL listed for wet locations (-20°- 50°C/-4°- 122°F).
- Meets UL924 NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.

Ordering Information

Model	Color	Options
MER-DBEL	BR Brown	SDT Self-diagnostics
	B Black	CW Cold weather
	W White	

Model	Color	Options
-	-	-

